

# NT240 SERIES



## BENEFITS

- ▶ Hands-free wavelength tuning – no need for physical intervention
- ▶ High repetition rate 1000 Hz enables fast data collection
- ▶ End pumping with diode technology ensures high reliability and low maintenance costs
- ▶ Narrow linewidth (down to  $3 \text{ cm}^{-1}$ ) and superior tuning resolution ( $1 - 2 \text{ cm}^{-1}$ ) allow recording of high quality spectra
- ▶ High integration level saves valuable space in the laboratory

- ▶ In-house design and manufacturing of complete systems, including pump lasers, guarantees on-time warranty and post warranty services and spares supply
- ▶ Variety of control interfaces: USB, RS232, LAN and WLAN ensures easy control and integration with other equipment
- ▶ Attenuator and fiber coupling options facilitate incorporation of NT240 systems into various experimental environments

NT240 series lasers produce pulses at an unprecedented 1 kHz pulse repetition rate, tunable over a broad spectral range. Integrated into a single compact housing, the diode pumped Q-switched Nd:YAG laser and OPO offers hands-free, no-gap tuning from 210 to 2600 nm. With its 1000 Hz repetition rate, the NT240 series laser establishes itself as a versatile tool for many laboratory applications, including laser induced fluorescence, flash photolysis, photobiology, metrology, remote sensing, etc.

NT240 series systems can be controlled from a remote control pad or/and a computer using supplied LabVIEW™ drivers. The control pad allows easy control of all parameters and features on a backlit display that is easy to read even with laser safety eyewear.

Thanks to a DPSS pump source, the laser requires little maintenance. It is equipped with air-cooled built-in chiller, which further reduces running costs. A built-in OPO pump energy monitor allows monitoring of pump

## Broadly Tunable kHz Pulsed DPSS Lasers

## FEATURES

- ▶ Customers recognized reliability
- ▶ Two years warranty
- ▶ Integrates DPSS pump laser and OPO into a single housing
- ▶ Hands-free no-gap wavelength tuning from **210 to 2600 nm\***
- ▶ **1000 Hz** pulse repetition rate
- ▶ More than **60  $\mu\text{J}$**  output pulse energy in UV
- ▶ Less than **5  $\text{cm}^{-1}$**  linewidth
- ▶ **3–6 ns** pulse duration
- ▶ Remote control via key pad or PC
- ▶ Optional separate output for the OPO pump beam 355 nm, 532 nm or 1064 nm

\* Automatic wavelength scan is programmable

## APPLICATIONS

- ▶ Laser-induced fluorescence spectroscopy
- ▶ Pump-probe spectroscopy
- ▶ Non-linear spectroscopy
- ▶ Time-resolved spectroscopy
- ▶ Photobiology
- ▶ Remote sensing
- ▶ Determination of the telescope throughput

laser performance without the use of external power meters. The optional feature provides a separate output port for the 1064, 532 or 355 nm beam.

SPECIFICATIONS <sup>1)</sup>

Model	NT242	NT242-SH	NT242-SF	NT242-SH/SF
<b>OPO</b>				
Wavelength range				
Signal			405–710 nm	
Idler			710–2600 nm	
SH and SF	—	210–300 nm	300–405 nm	210–405 nm
Pulse energy <sup>2)</sup>				
OPO			450 $\mu$ J	
SH and SF	—	40 $\mu$ J at peak		60 $\mu$ J at peak
Pulse repetition rate			1000 Hz	
Pulse duration <sup>3)</sup>			3–6 ns	
Linewidth <sup>4)</sup>			< 5 cm <sup>-1</sup>	
Minimal tuning step <sup>5)</sup>				
Signal			1 cm <sup>-1</sup>	
Idler			1 cm <sup>-1</sup>	
SH and SF	—			2 cm <sup>-1</sup>
Polarization				
Signal			horizontal	
Idler			vertical	
SH and SF	—		vertical	
Typical beam diameter <sup>6)</sup>			3 × 6 mm	
<b>PUMP LASER</b>				
Pump wavelength <sup>7)</sup>	355 nm		355 / 1064 nm	
Typical pump pulse energy <sup>8)</sup>	3 mJ		3 / 1 mJ	
Pulse duration <sup>3)</sup>		4–6 ns at 1064 nm		
<b>PHYSICAL CHARACTERISTICS</b>				
Unit size (W × L × H) <sup>9)</sup>		456 × 1040 × 297 mm		
Power supply size (W × L × H)		520 × 400 × 286 mm		
Umbilical length		2.5 m		
<b>OPERATING REQUIREMENTS</b>				
Cooling		built-in chiller		
Room temperature		18–27 °C		
Relative humidity		20–80 % (non-condensing)		
Power requirements		100–240 V AC, single phase 50/60 Hz		
Power consumption		< 1.5 kW		
Cleanliness of the room		not worse than ISO Class 9		

<sup>1)</sup> Due to continuous improvement, all specifications are subject to change. Parameters marked typical are illustrative; they are indications of typical performance and will vary with each unit we manufacture. Unless stated otherwise, all specifications are measured at 450 nm and for basic system without options.

<sup>2)</sup> See tuning curves for typical outputs at other wavelengths.

<sup>3)</sup> Measured at FWHM level with photodiode featuring 1 ns rise time and 300 MHz bandwidth oscilloscope.

<sup>4)</sup> Linewidth is <8 cm<sup>-1</sup> for 210–405 nm range.


<sup>5)</sup> For manual input from PC. When wavelength is controlled from keypad, tuning resolution is 0.1 nm for signal, 1 nm for idler and 0.05 nm for SH and SF.

<sup>6)</sup> Beam diameter is measured at 450 nm at the 1/e<sup>2</sup> level and can vary depending on the pump pulse energy.

<sup>7)</sup> Separate output port for the 3rd and other harmonic is optional.

<sup>8)</sup> The pump laser pulse energy will be optimized for best OPO performance. The actual pump laser output can vary with each unit we manufacture.


<sup>9)</sup> Length from 1040 to 1233 mm depending on configuration.




## Accessories and optional items

Option	Features
-SH	Tuning range extension in UV range (210–300 nm) by second harmonic generation
-SF	Tuning range extension in 300–405 nm range by sum-frequency generation
-SH/SF	Tuning range extension in 210 – 405 nm range by combining second harmonics and sum-frequency generator outputs for maximum possible pulse energy
-SCU	Spectral filtering accessory for improved spectral purity of pulses
-H, -2H, -3H	1064, 532 and 355 nm output via separate port
-FC	Fiber coupled output in 350 – 2000 nm range
-Attn	Attenuator output in 210 – 2600 nm range

## PERFORMANCE

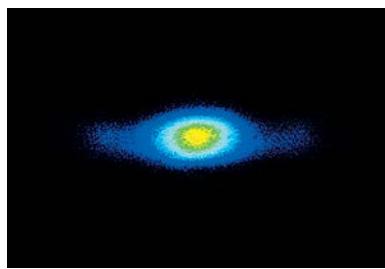

Near field

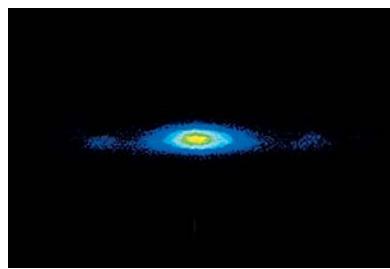

Far field

Fig 1. Typical beam profiles of NT242 series lasers at 500 nm

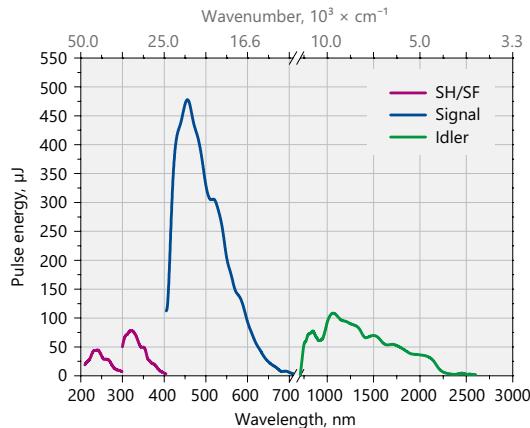


Fig 2. Typical output pulse energy of NT242 series tunable laser

## OUTLINE DRAWINGS

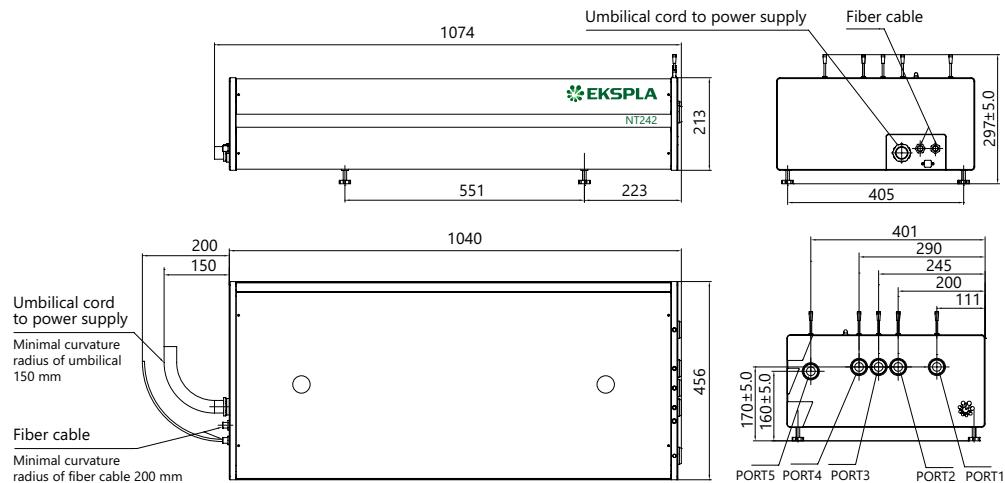


Fig 3. NT242 series laser head dimensions

## ORDERING INFORMATION

**Note:** Laser must be connected to the mains electricity all the time. If there will be no mains electricity for longer than 1 hour then laser (system) needs warm up for a few hours before switching on.

NT242-SH-H-2H-SCU	
Model	Options:
Optional tuning range extension:	
SH → 210–300 nm	H → extra 1064 nm output
SF → 300–405 nm	2H → extra 532 nm output
SH/SF → 210–405 nm	SCU → spectral filtering accessory